





made in Germany

Ελαστικό προστατευτικό

Πανίσχυρη μπαταρία 2.0Ah

Εργονομική λαβή

Ένδειξη φορτίου μπαταρίας

Μακρύς γεμιστήρας αλουμινίου για 40 ατσάλοκαρφα έως 58 mm μήκος

Χωρίς εγκοπές  
Αποφεύγονται οι βλάβες από εισερχόμενη σκόνη

Εύκολα αποσπώμενη μούρη

Μαγνητική μύτη

**Το ισχυρότερο εργαλείο στην κατηγορία του ιδανικό για επαγγελματίες με υψηλές απαιτήσεις**

Το νέο CN60-688ES είναι ιδανικό στις οικοδομικές κατασκευές για κάρφωμα σε μπετόν-μέταλλο, μπετόν-ξύλο, γυψοσανίδες, αμμότουβλα. Με μεγάλης χωρητικότητας γεμιστήρα, χαμηλό θόρυβο και μπαταρία υψηλής απόδοσης 2.0 Ah. Καρφώνει ατσάλοκαρφα 2,6 από 15-60mm



**Α Φιάλη γκαζιού**

- Καθαρό αέριο
- Πλήρως συνθετικό λιπαντικό
- Υψηλής ακριβείας βαλβίδα
- Χωρίς CFC
- Απεριόριστη διάρκεια ζωής
- Φιλική προς το περιβάλλον




# Installation Applications



## Applications

- Dry Lining
- Plumbing Applications
- Pre Plumbed Panel Installations
- Electrical Installations
- Modular Build Applications

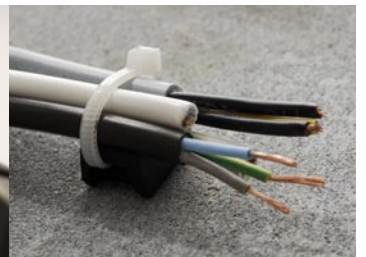



### TOOL CASE

- Dynamik CN60-688ES Concrete Nailer
- Intelligent charger
- Two high capacity batteries
- Adapter sleeve for standard 40 g fuel cell
- Safety glasses
- End user manual
- Allen key



### TECHNICAL DATA

Type	CN60-688ES	Dimension L/W/H	453/119/381 mm
Collation type	0° degree	Nail diameter	2.6 mm (0.102")
Magazine type	Rear loader	Nails per strip	10
Magazine capacity	40 nails	Nail lengths	15 - 58 mm (9/16" - 2 1/4")
Max. drives per hour	1,000 nails	Emission sound pressure at the workstation $L_{pA, 1s,d}$	96 dB
Average drives per battery charge	up to 5,000		
Average drives per fuel cell, 40g	1,100 nails		
Mode of actuation	Sequential	This tool conforms to the EN 12100-1-2004, EN 12100-2-2004, EN 792-13-2000 of Directive 98/37/EC.	
Weight (without battery)	3.68 kg (8.1 lbs)		
Battery	0.28 kg (0.6 lbs)		

For more information visit: [www.bea-group.com](http://www.bea-group.com)

Distributor Stamp

